








Q clamp



Product Guide






*Pre-drilling not advised

*Pre-drilling not advised








*Pre-drilling not advised

*Pre-drilling not advised







*Pre-drilling not advised




*Pre-drilling not advised






*Pre-drilling not advised



*Pre-drilling not advised



*Pre-drilling not advised



*Pre-drilling not advised

*Pre-drilling not advised

*Pre-drilling not advised


*Pre-drilling not advised



*Image shows 2 fittings



*Image shows 2 fittings

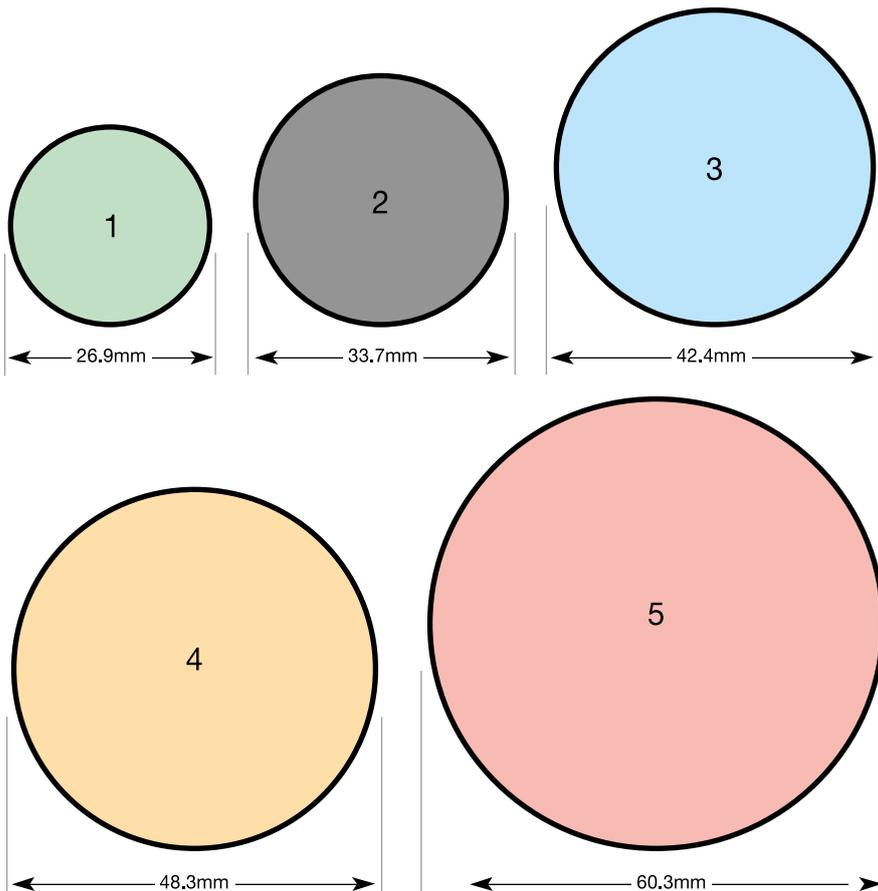

GALVANISED TUBE AVAILABLE IN VARIOUS LENGTHS

GALVANISED BLACKHEART MALLEABLE IRON FITTINGS TO BS EN 1562:1997, GRADE B2-10 WITH GALVANISING TO BS EN 1461:1999 ALSO AVAILABLE TO ORDER IN RAL COLOURS

TABLE OF SIZES

	TUBE DIA MM O/D	NOMINAL BORE
1	26.9	3/4"
2	33.7	1"
3	42.4	1 1/4"
4	48.3	1 1/2"
5	60.3	2"



Handrail Standards & Fencing Infills



QCSEMR
Mid-Rail



QCSEPR
End Post



QCSEPR
Corner Post



Powder coated



Fencing infill

Handrail standards enable easier and faster installation of safety railing, handrails and barriers.

These pre-assembled posts comprise galvanised EN10255 tube and Qclamp® fittings. They are supplied at a standard height of 1100mm with the lower rail fitting being set at approximately 560mm from the base. This height can be adjusted to suit the handrail installation. Each post is built using a 1075mm length of tube and is available in size 2, 3 and 4.

These are also available to order powder coated in various RAL colours, price on application.

Fencing infills are also available for use with the Qclamp® fittings and handrail standards for fencing and gate structures.

DDA Range



DDA 1
Elbow



DDA 2
End Plate



DDA 3
Post Connector




DDA 4
Post End Connector



DDA 5
Variable Elbow



DDA 6
Wall Plate



150-3
Internal Connector



101-4
Short Tee



125-4
Elbow

These fittings have been designed to comply with the Equality Act 2010 (Formerly the Disability Discrimination Act (DDA) 1995) and the Buildings Regulations 2010 – Part M: Access to and use of buildings.

Under these regulations, owners of commercial and public buildings are required to provide nondiscriminatory access to their buildings. This range of fittings provides a simple cost effective solution to help builders and contractors to satisfy these requirements.

These fittings are used in conjunction with BS EN 10255 medium weight 32mm nominal bore galvanised tube and Qclamp® fittings and require no welding or skilled assembly.



Q clamp

NOTE: The standard finish is hot-dipped galvanised.

Whilst every care has been taken to ensure that the information given in this manual is correct, we reserve the right to alter and revise this information as and when we consider it necessary. This is in-line with their policy of research and development.